



PVC 細蕊控制電纜

CHENG HWA PVC CONTROL CABLE | CHENG HWA ENTERPRISE CO.,LTD.

-導體：裸軟銅線絞合

-芯線：PVC 絕緣

-外被：PVC 被覆

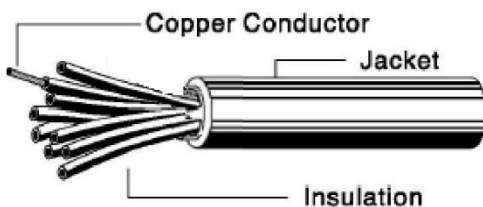
-通過 UL 安全認證

-導體電阻最大：2.0m/m² 9.91Ω/KM 以下(20 °C)

-耐溫：60 °C

-符合 RoHS 規範

-耐電壓：600V

斷面積 MM ²	導體 條數/mm	芯數 Core	絕緣厚度 mm	芯線外徑 mm	外被厚度 mm	完成外徑 mm	重量 Kg/100m
2.0mm 平方	37/0.26	2C	0.6	3.0	1.1	8.2	10.9
		3C			1.1	8.7	13.3
		4C			1.2	9.6	16.7
		5C			1.3	10.7	20.8
		6C			1.4	11.8	25.2
		7C			1.4	11.8	26.6
		8C			1.4	12.7	30.6
		10C			1.5	15.0	41.2
		12C			1.5	15.5	45.8
		16C			1.5	17.1	57.6
		20C			1.6	18.8	70.5
		24C			1.8	21.6	89.8
		30C			1.8	23.0	105.7
		36C			2.1	25.2	126.8
		40C			2.3	26.6	141.2
		50C			2.5	30.2	179.8
結構圖： 							

鄭華企業有限公司 | <http://www.cheng-hwa.com.tw>

桃園市桃園區鎮東街 5 號 | 03-3341764