



PVC 細芯控制電纜

CHENG HWA PVC CONTROL CABLE | CHENG HWA ENTERPRISE CO.,LTD.

-導體：裸軟銅線絞合

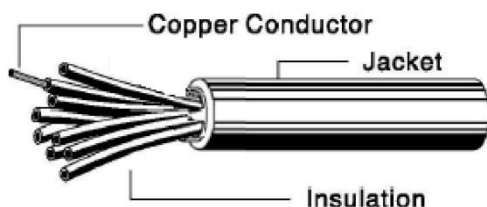
-導體電阻最大：0.3m/m² 63.0Ω/KM 以下(20 °C)

-芯線：PVC 絕緣

-耐溫：60 °C

-外被：PVC 被覆

-耐電壓：600V

線號 AWG	斷面積 MM²	導體 條數/mm	芯數 Core	絕緣厚度 mm	芯線外徑 mm	外被厚度 mm	完成外徑 mm	重量 Kg/100m
22	0.3	12/0.18	2C	0.4	1.6	0.6	4.4	2.8
			3C			0.6	4.6	3.2
			4C			0.7	5.3	4.3
			5C			0.7	5.7	5.1
			6C			0.8	6.4	6.3
			7C			0.8	6.4	6.6
			8C			0.8	6.9	7.6
			10C			1.1	8.6	11.2
			12C			1.1	8.8	12.1
			16C			1.2	9.9	15.5
			20C			1.3	10.9	18.9
			24C			1.4	12.4	24.1
			30C			1.4	13.1	27.6
			36C			1.5	14.2	32.6
			40C			1.5	14.6	34.9
			50C			1.5	16.5	44.3
結構圖： 								

鄭華企業有限公司 | <http://www.cheng-hwa.com.tw>

桃園市桃園區鎮東街 5 號 | 03-3341764

-導體：裸軟銅線絞合

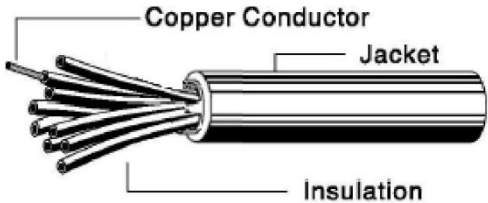
-芯線：PVC 絕緣

-外被：PVC 被覆

-導體電阻最大：0.5m/m² 38.6Ω/KM 以下(20 °C)

-耐溫：60 °C

-耐電壓：600V

線號 AWG	斷面積 MM ²	導體 條數/mm	芯數 Core	絕緣厚度 mm	芯線外徑 mm	外被厚度 mm	完成外徑 mm	重量 Kg/100m
20	0.5	20/0.18	2C	0.4	1.8	0.7	5.0	3.8
			3C			0.7	5.3	4.5
			4C			0.8	5.9	5.7
			5C			0.8	6.5	7.0
			6C			0.9	7.2	8.6
			7C			0.9	7.2	8.9
			8C			1.1	8.1	11.0
			10C			1.1	9.4	14.5
			12C			1.2	10.0	16.7
			16C			1.3	11.1	21.0
			20C			1.4	12.3	25.9
			24C			1.4	13.6	31.5
			30C			1.4	14.4	36.5
			36C			1.5	15.6	43.1
			40C			1.5	16.1	46.5
			50C			1.5	18.1	58.6
結構圖： 								

-導體：裸軟銅線絞合

-芯線：PVC 絕緣

-外被：PVC 被覆

-導體電阻最大：0.75m/m² 25.8Ω/KM 以下(20 °C)

-耐溫：60 °C

-耐電壓：600V

線號 AWG	斷面積 MM ²	導體 條數/mm	芯數 Core	絕緣厚度 mm	芯線外徑 mm	外被厚度 mm	完成外徑 mm	重量 Kg/100m
18	0.75	30/0.18	2C	0.5	2.3	0.8	6.2	5.8
			3C			0.9	6.8	7.3
			4C			0.9	7.4	8.9
			5C			1.0	8.2	11.0
			6C			1.1	9.1	13.4
			7C			1.1	9.1	14.0
			8C			1.2	10.0	16.7
			10C			1.3	11.8	22.6
			12C			1.4	12.4	25.4
			16C			1.5	13.8	32.1
			20C			1.5	15.2	39.3
			24C			1.5	16.8	47.8
			30C			1.5	17.8	55.4
			36C			1.6	19.3	65.5
			40C			2.0	21.0	76.1
			50C			2.0	23.4	94.7
結構圖：								

-導體：裸軟銅線絞合

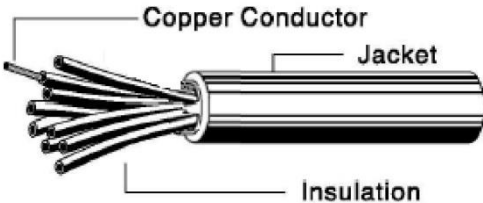
-芯線：PVC 絕緣

-外被：PVC 被覆

-導體電阻最大：1.25m/m² 15.6Ω/KM 以下(20 °C)

-耐溫：60 °C

-耐電壓：600V

線號 AWG	斷面積 MM ²	導體 條數/mm	芯數 Core	絕緣厚度 mm	芯線外徑 mm	外被厚度 mm	完成外徑 mm	重量 Kg/100m
16	1.25	50/0.18	2C	0.5	2.5	0.8	6.6	7.2
			3C			0.8	7.0	8.8
			4C			0.9	7.8	11.1
			5C			1.0	8.8	14.1
			6C			1.1	9.7	17.1
			7C			1.1	9.7	18.0
			8C			1.2	10.7	21.4
			10C			1.4	12.8	29.3
			12C			1.4	13.2	32.4
			16C			1.5	14.8	41.6
			20C			1.5	16.3	51.0
			24C			1.5	18.0	61.9
			30C			1.5	19.2	72.9
			36C			1.8	21.1	87.8
			40C			2.0	22.4	98.4
			50C			2.1	25.2	124.0
結構圖： 								

-導體：裸軟銅線絞合

-芯線：PVC 絕緣

-外被：PVC 被覆

-導體電阻最大：2.0m/m² 9.91Ω/KM 以下(20 °C)

-耐溫：60 °C

-耐電壓：600V

線號 AWG	斷面積 MM ²	導體 條數/mm	芯數 Core	絕緣厚度 mm	芯線外徑 mm	外被厚度 mm	完成外徑 mm	重量 Kg/100m
14	2.0	37/0.26	2C	0.6	3.0	1.1	8.2	10.9
			3C			1.1	8.7	13.3
			4C			1.2	9.6	16.7
			5C			1.3	10.7	20.8
			6C			1.4	11.8	25.2
			7C			1.4	11.8	26.6
			8C			1.4	12.7	30.6
			10C			1.5	15.0	41.2
			12C			1.5	15.5	45.8
			16C			1.5	17.1	57.6
			20C			1.6	18.8	70.5
			24C			1.8	21.6	89.8
			30C			1.8	23.0	105.7
			36C			2.1	25.2	126.8
			40C			2.3	26.6	141.2
			50C			2.5	30.2	179.8
結構圖： 								